DESIGNLIGHT
SCANDINAVIAN AB

STOLPARMATUR GATY ASY
E-NR: 77 295 49 ART NR: G004-4311

Effekt Power	Material Material	Kelvin Kelvin	Armaturfärg Armature color	Anslutning Connection	Total Lumen	Useful Lumen
25W/ 50W/ 75W	Aluminium	3000K	Grå/Grey	230V	3525lm 7050lm 10576lm	3266lm 6533lm 9800lm

RoHS CE

IP65 IK08 230 VOLT CRI >70

LIFETIME
L70B50: >75.000H



- Asymmetrisk optik, lämplig för parkeringar och öppna områden
- Energieffektiv LED-teknik
- Lång livslängd och minimalt underhåll
- IP65-klassad för robust utomhusmiljö
- Enkel installation och justering

- Asymmetric optics, suitable for parking lots and open areas
- Energy-efficient LED technology
- Long life and minimal maintenance
- IP65 rated for robust outdoor environments
- Easy installation and adjustment

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

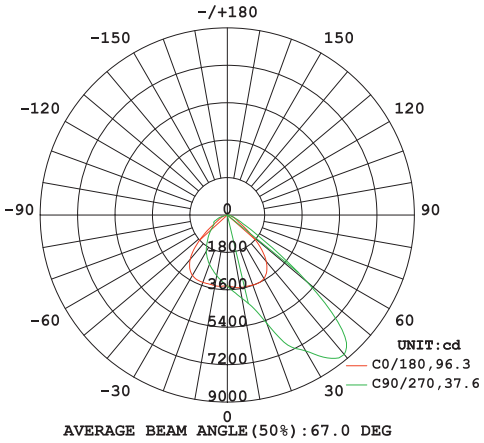

AVERAGE BEAM ANGLE(50%):67.0 DEG

Antal armaturer per säkring/ Number of light fittings per fuse

B16	C16
36	36

Mått/Dimension

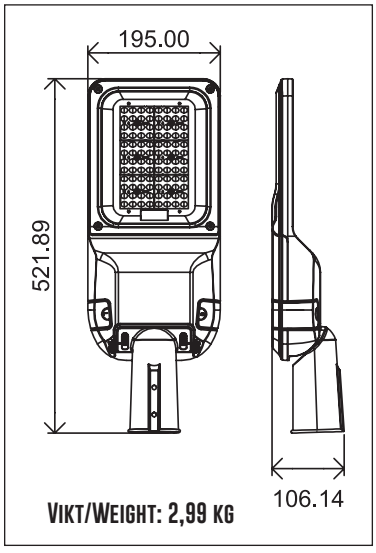

Vikt/Weight: 2,99 kg

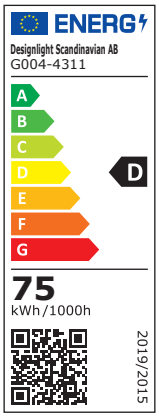

Säkerhet:

1 Installation och underhåll ska utföras av behörig installatör.
2 Armaturens ljuskälla och driver är utbytbara av behörig installatör.
3 Vid skada på armaturens yttre eller inre kablar, får dessa enbart bytas ut av leverantör eller en av leverantören utsedd representant eller en behörig installatör.
4 Se till att materialet där armaturen fästs är tillräckligt starkt och att skruvarna dragits åt ordentligt.
5 Jord ska vara väl ansluten.
6 Se till att armaturen är kopplad med rätt märkspänning.
7 Använd inte kemiska eller frätande medel för att rengöra armaturen.
8 Minsta avstånd mellan armatur och upplyst objekt ska vara minst 0,3 meter. (0,3M)
9 Trasigt glas måste bytas av behörig installatör.

Safety:

1 Installation and maintenance must be carried out by a qualified installer.
2 The luminaire's light source and driver can be replaced by a qualified installer.
3 In the event of damage to the luminaire's external or internal cables, these may only be replaced by the supplier or a representative appointed by the supplier or a authorized installer.
4 Make sure that the material where the fixture is attached is strong enough and that the screws are properly tightened.
5 Earthed cable must be well connected.
6 Make sure the luminaire is connected with the correct rated voltage.
7 Do not use chemical or corrosive agents to clean the fixture.
8 The minimum distance between the luminaire and the illuminated object must be at least 0.3 metres. (0,3M)
9 Broken glass must be replaced by a qualified installer.

PRODUCT 5 YEAR WARRANTY

1.900K	2.700–3.000K	4.000–4.500K	4.800K	5.000–5.000K	7.000–7.500K	10.000K
Stearinljus Candle	Varmvit Warm White	Naturlig vit Natural White	Solljus Direct Sun	Vitt dagsljus Day White	Kallvit Cool White	Blå himmel Blue Sky

REUSE · RECYCLED · RECYCLABLE · REDUCE

LÄS MER OM VÅRA GARANTIVILLKOR PÅ WWW.DESIGNLIGHT.NU READ MORE ABOUT OUR WARRANTY CONDITIONS AT: WWW.DESIGNLIGHT.NU

DESIGNLIGHT
SCANDINAVIAN AB

DESIGNLIGHT SCANDINAVIAN AB · Toffelvägen 1 · SE-342 60 Moheda · SWEDEN
Telefon/Phone +46 (0)472-716 10 · info@designlight.nu · designlight.nu